


**1050304 | Standard machine tap HSS -M -TivolyNorm
-Straight entry -6H -Hexagonal shank**

Straight tap for stainless steel, aluminium, adaptable to suit screwdrivers, drills, and bit holders. 6.35 hexagonal shank..

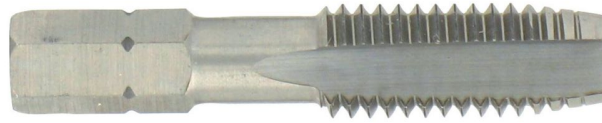

- Especially for soft steels and plastics
- Especially for the Shock Series

- Quick-change shank
- High-speed steel

Machine



Application

P 1	P 2	P 3
P1- Unrealized steels	P2- Weakly allied steels	P3- strong alloy steels

Features

M	6H		HSS	BRIGHT UNCOATED	TIVOLY NORM	HEXA 6.35mm
---	----	--	-----	-----------------	-------------	-------------

Properties and benefits

- + Quick-Change hex attachment: a hexagonal recessed attachment for the quick locking and unlocking of the bit. Compliant with the DIN 3126 E6.3 standard → Enables the quick changing of your bits by doing away with the manual tightening/loosening of the chuck. For drills and screwdrivers.
- + High-speed steel: HSS substrate → For general use in steels and cast irons up to 950 N/mm²



Code	EAN	Thread	Ø	Pitch	Norm	Drill	L	I	I4	I5	QTY	PCB
1050304030050	3221910881788	M 3	3	0.5	TivolyNorm	2,50	36	9	3-3.5		1	1
1050304040070	3221910881795	M 4	4	0.7	TivolyNorm	3,30	39	10	3-3.5		1	1
1050304050080	3221910881801	M 5	5	0.8	TivolyNorm	4,20	41	15	3-3.5		1	1
1050304060100	3221910881818	M 6	6	1	TivolyNorm	5,00	44	15	3-3.5		1	1
1050304080125	3221910881825	M 8	8	1.25	TivolyNorm	6,80	49	16	3-3.5		1	1
1050304100150	3221910881832	M 10	10	1.5	TivolyNorm	8,50	52	18	3-3.5		1	1