

60° drill for centring (Total length: 100). Form A.




■ 5% cobalt HSS


**Machine**



**Application**

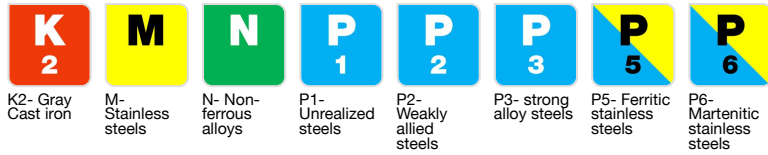

**Features**



**Properties and benefits**

+ 5% cobalt high-speed steel: HSS substrate enriched with 5% cobalt. Improved heat retention (strength, cutting sharpness) ➔ For general use in metals up to 1200 N/mm<sup>2</sup>.



Code	EAN	Ø	d2/CM	L	l	lu	QTY	PCB
8140861300100	3221910481537	3	10	100	3.9		1	1
8140861400100	3221910481544	4	10	100	5		1	1
8140861400120	3221910481551	4	12	100	5		1	1