

120° drill for pointing, deburring, countersinking.




- High-speed steel
- Made in France
- Cylindrical shank
- 5% cobalt HSS

Machine



Application

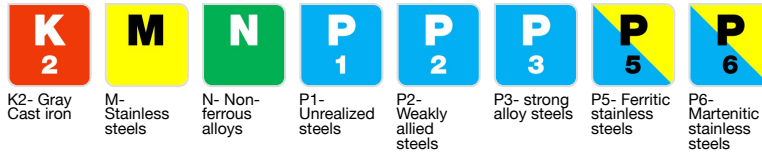

Features



Properties and benefits

- + Cylindrical shank: the diameter of the shank is equal to the diameter of the tip. ➔ Enables versatile use on portable electrical tools and CNC machine tools.
- + 5% cobalt high-speed steel: HSS substrate enriched with 5% cobalt. Improved heat retention (strength, cutting sharpness) ➔ For general use in metals up to 1200 N/mm².



Code	EAN	Ø	d2/CM	L	l	lu	QTY	PCB
81409110300	3221910757908	3	3	50	10		1	1
81409110400	3221910757915	4	4	52	12		1	1
81409110500	3221910757922	5	5	60	15		1	1
81409110600	3221910757939	6	6	66	20		1	1
81409110800	3221910757946	8	8	79	25		1	1
81409111000	3221910757953	10	10	89	25		1	1
81409111200	3221910757960	12	12	102	30		1	1
81409111600	3221910757977	16	16	115	35		1	1
81409112000	3221910757984	20	20	131	40		1	1