

960IRH1 | Machine tap HSS-E5 (cobalt 5%) -ALINOX coated -M MF -DIN 371/374/376 -Thread-former -6HX -Grooved

by deformation tap for multi-applications. The ALINOX coating increases tool life and heat resistance.




- Especially for stainless steels
- Precise thread tapping
- Made in Spain
- 5% cobalt HSS

Machine



Application

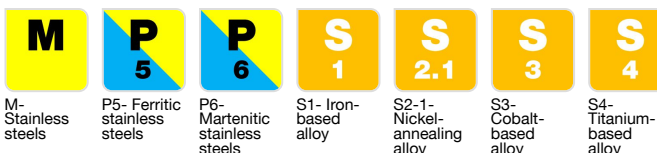

Features



Properties and benefits

- + 5% cobalt high-speed steel: HSS substrate enriched with 5% cobalt. Improved heat retention (strength, cutting sharpness) ➡ For general use in metals up to 1200 N/mm².



Code	EAN	Thread	Ø	Pitch	Norm	Drill	L	I	I4	I5	QTY	PCB
960IRH100300050	3221912233424	M	3	0.5	DIN 371	2,80	56	10	2-2.5	2,70	1	1
960IRH100400070	3221912233431	M	4	0.7	DIN 371	3,70	63	12	2-2.5	3,40	1	1
960IRH100500080	3221912233448	M	5	0.8	DIN 371	4,65	70	12	2-2.5	4,90	1	1
960IRH100600100	3221912233455	M	6	1	DIN 371	5,60	80	15	2-2.5	4,90	1	1
960IRH100800100	3221912233462	MF	8	1	DIN 371	7,50	90	18	2-2.5	6,20	1	1
960IRH100800125	3221912233479	M	8	1.25	DIN 371	7,40	90	18	2-2.5	6,20	1	1
960IRH101000100	3221912233486	MF	10	1	DIN 371	9,50	90	18	2-2.5	8,00	1	1
960IRH101000150	3221912233493	M	10	1.5	DIN 371	9,30	100	22	2-2.5	8,00	1	1
960IRH101200150	3221912233509	MF	12	1.5	DIN 374	11,30	100	22	2-2.5	7,00	1	1
960IRH101200175	3221912233516	M	12	1.75	DIN 376	11,20	110	22	2-2.5	7,00	1	1
960IRH101400150	3221912233523	MF	14	1.5	DIN 374	13,30	100	22	2-2.5	7,00	1	1
960IRH101400200	3221912233530	M	14	2	DIN 376	13,00	110	25	2-2.5	9,00	1	1
960IRH101600200	3221912233547	M	16	2	DIN 376	15,00	110	28	2-2.5	8,00	1	1